




PVP 1030

PVP 1045

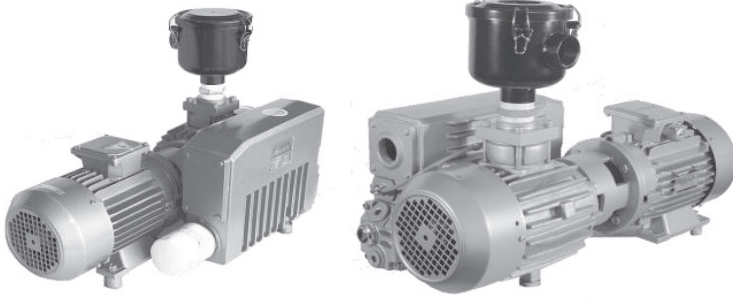

		50 Hz		60 Hz		50 Hz		60 Hz	
		3 faz 3 Ph	1 faz 1 Ph	3 faz 3 Ph	1 faz 1 Ph	3 faz 3 Ph	1 faz 1 Ph	3 faz 3 Ph	1 faz 1 Ph
Nominal kapasite	m³/saat	30				45			
Nominal capacity	m³/h								
Maksimum kapasite	m³/saat	36				54			
Maximum capacity	m³/h								
Mutlak basınç	mbar	0.5				0.5			
Absolute pressure									
Giriş ağzı	dişli	R 1¼"				R 1¼"			
Inlet diameter	Threaded								
Motor gücü	kW	1.1	1.5	1.35	-	1.5	2.2	1.8	-
Rated power									
Motor devri	d/dk	1450		1750		1450		1750	
Rotation speed	rpm (n/min)								
Çalışma sıcaklığı	°C	75 - 80		80 - 85		70 - 75		75 - 80	
Operating temperature									
Gürültü seviyesi	dB(A)	65		67		66		68	
Noise level									
Yağ miktarı	lt	1				1.4			
Pump fluid filling	l								
Ağırlık	kg	30	32	30	32	50	52	50	52
Weight	kgs								

- A Filtre vakum girişi
Vacuum inlet from filter
- B Pompa ağzı
Pump inlet
- C Çıkış
Exhaust
- D Yağ doldurma noktası
Oil filling cover

	PVP 1030	PVP 1045
L	596	606

