

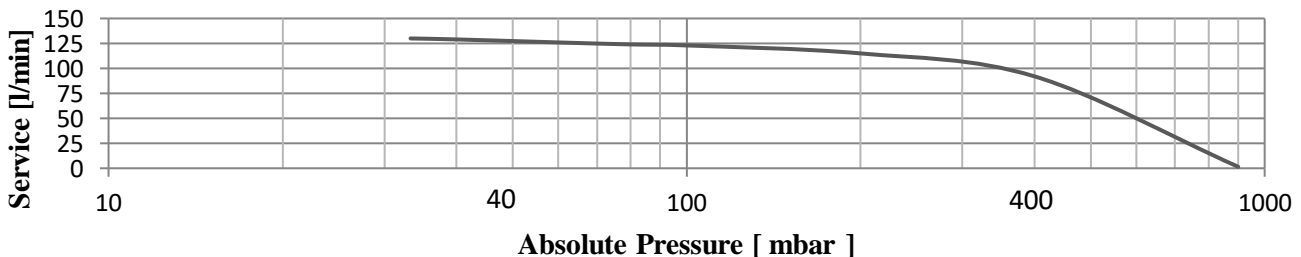


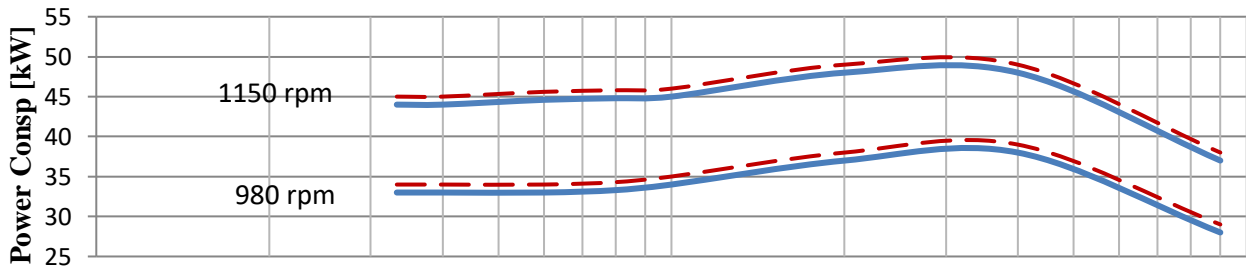

Double-Stage Pump

Nominal capacity	: 950 m ³ /h	<u>Motor power</u>	
Maximum capacity	: 1800 m ³ /h	50 Hz frequency	: 45 kW
Absolute pressure	: 33 mbar	(60 Hz frequency	: 54 kW)
Vacuum pressure	: -735 mm-Hg	<u>Rotation</u>	
(Deniz seviyesinde)		50 Hz frequency	: 980 rpm
Inlet & outlet port	: DN 100	(60 Hz frequency	: 1150 rpm)
<u>Maximum gas temperature</u>		<u>Service liquid</u>	
Dry	: 200 °C	amount	: 130 l/min
Saturated	: 100 °C	inlet	: 1.1/2"
Max.compression over pressure	: 0,3 bar	Max.admissible temperature	: 80 °C
Max. pressure difference	: 1,1 bar	max. viscosity	: 4 mm ² /s
Inertial moment	: 0,003 kg.m ²	max. density	: 1200 kg/m ³
<u>Weight</u>		Volume up to the shaft level	: 35 l
Complete with motor	: 1260 kg	Sound level	: 68 dB
Without motor & coupling	: 680 kg	(at a suction pressure of 80 mbar)	

Performance Curves

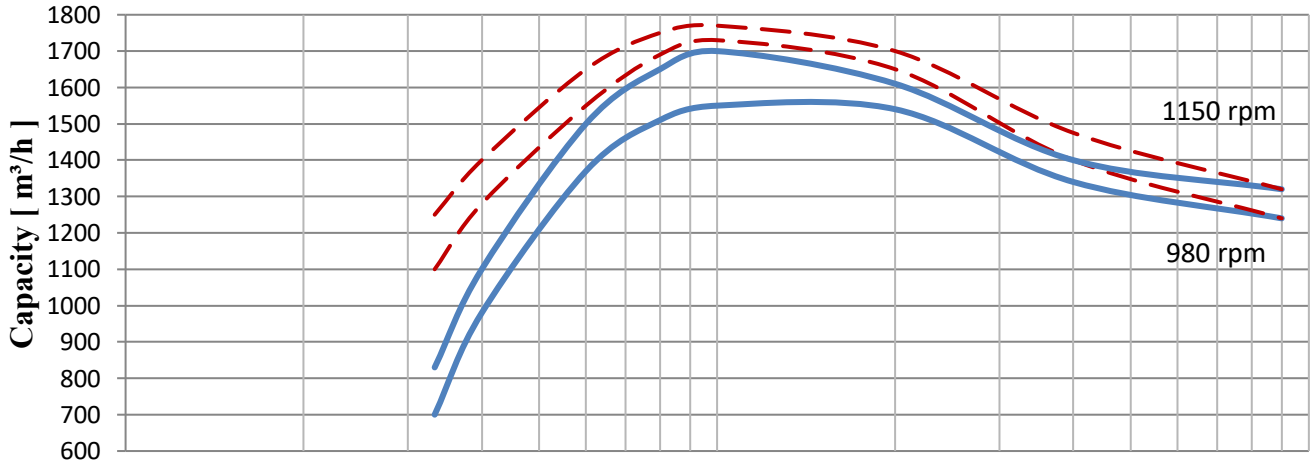

— Dry air - - - - Saturated air